



# Indian Telecom Security Assurance Requirements (ITSAR) भारतीय दूरसंचार सुरक्षा आश्वासन आवश्यकताएँ (भा.दू.सु.आ.आ.)

## Application Function (AF) of 5G

**ITSAR Number:** ITSAR111142311

**ITSAR Name:** NCCS/ITSAR/Core Equipment/5G Sub-systems/Application Function (AF) of 5G

Date of Release: 30.11.2023

Date of Enforcement:

Version: 1.0.0

© रा.सं.सु.के., २०२३  
© NCCS, 2023

MTCTE के तहत जारी:  
Issued under MTCTE by:

राष्ट्रीय संचार सुरक्षा केंद्र (रा.सं.सु.के.)  
दूरसंचार विभाग, संचार मंत्रालय  
भारत सरकार  
सिटी दूरभाष केंद्र, एसआर नगर, बैंगलोर-५६००२७, भारत

**National Centre for Communication Security (NCCS)**  
**Department of Telecommunications**  
**Ministry of Communications**  
**Government of India**  
**City Telephone Exchange, SR Nagar, Bangalore-560027, India**

## About NCCS

National Centre for communication Security (NCCS), with headquarters at Bengaluru was set up in 2018 with the objective to establish and operationalize a framework of security testing and certification of telecommunication/ICT within the country. NCCS is mandated to prepare Telecom security requirements/standards called Indian Telecom Security Assurance Requirements (ITSAR) that addresses the country specific security needs in telecommunication landscape and notify the same.



## Document History

S.no	Title	ITSAR no	Version	Date of release	Remark
1.	Application Function (AF) of 5G	ITSAR111142311	1.0.0	30.11.2023	



*Securing Networks*

# Table of Contents

A)Outline .....	6
B)Scope .....	6
C)Conventions.....	6
Chapter 1 – Overview.....	7
Chapter 2 – Common Security Requirements.....	9
Section 2.1: Access And Authorization .....	9
2.1.1 Management Protocols Mutual Authentication .....	9
2.1.2 Management Traffic Protection.....	9
2.1.3 Role-Based Access Control Policy.....	9
2.1.4. User Authentication – Local/Remote.....	9
2.1.5 Remote Login Restrictions For Privileged Users.....	10
2.1.6 Authorization Policy .....	10
2.1.7 Unambiguous Identification Of The User & Group Accounts Removal.....	10
Section 2.2: Authentication Attribute Management.....	10
2.2.1 Authentication Policy .....	10
2.2.2 Authentication Support – External .....	11
2.2.3 Protection Against Brute Force And Dictionary Attacks .....	11
2.2.4 Enforce Strong Password.....	11
2.2.5 Inactive Session Timeout.....	12
2.2.6 Password Changes.....	12
2.2.7 Protected Authentication Feedback.....	13
2.2.8 Removal Of Predefined Or Default Authentication Attributes.....	13
2.2.9 Logout Function .....	14
2.2.10 Policy Regarding Consecutive Failed Login Attempts .....	14
2.2.11 Suspend Accounts On Non-Use.....	14
Section 2.3: Software Security .....	14
2.3.1 Secure Update .....	14
2.3.2 Secure Upgrade.....	15
2.3.3 Source Code Security Assurance.....	15
2.3.4 Known Malware And Backdoor Check.....	16
2.3.5 No Unused Software .....	16
2.3.6 Unnecessary Services Removal .....	16
2.3.7 Restricting System Boot Source .....	17
2.3.8 Secure Time Synchronization .....	17
2.3.9 Restricted Reachability Of Services .....	17
2.3.10 Self Testing.....	18
Section 2.4: System Secure Execution Environment.....	18
2.4.1 No Unused Functions .....	18
2.4.2 No Unsupported Components.....	18
2.4.3 Avoidance Of Unspecified Mode Of Access .....	18
Section 2.5: User Audit.....	19
2.5.1 Audit Trail Storage And Protection.....	19
2.5.2 Audit Event Generation .....	19
2.5.3 Secure Log Export.....	22
2.5.4 Logging Access To Personal Data .....	22

Section 2.6: Data Protection.....	22
2.6.1 Cryptographic Based Secure Communication .....	22
2.6.2 Cryptographic Module Security Assurance .....	23
2.6.3. Cryptographic Algorithms Implementation Security Assurance .....	23
2.6.4. Protecting Data And Information – Confidential System Internal Data .....	23
2.6.5. Protecting Data And Information In Storage .....	24
2.6.6 Protection Against Copy Of Data.....	24
2.6.7 Protection Against Data Exfiltration - Overt Channel.....	24
2. 6.8 Protection Against Data Exfiltration - Covert Channel.....	24
Section 2.7: Network Services.....	25
2.7.1 Traffic Filtering – Network Level Requirement.....	25
2.7.2 Traffic Separation .....	25
2.7.3 Traffic Protection –Anti-Spoofing.....	26
Section 2.8: Attack Prevention Mechanisms .....	26
2.8.1 Network Level And Application-Level Ddos .....	26
2.8.2 Excessive Overload Protection .....	26
2.8.3 Manipulated Packets That Are Sent To An Address Of The Network Device Shall Not Lead To An Impairment Of Availability. ....	27
Section 2.9: Vulnerability Testing Requirements.....	27
2.9.1 Fuzzing – Network And Application Level.....	27
2.9.2 Port Scanning.....	27
2.9.3 Vulnerability Scanning.....	27
Section 2.10: Operating System.....	28
2.10.1 Growing Content Handling.....	28
2.10.2 Handling Of Icmp.....	28
2.10.3 Authenticated Privilege Escalation Only .....	29
2.10.4 System Account Identification .....	29
2.10.5 Os Hardening - Minimized Kernel Network Functions .....	30
2.10.6 No Automatic Launch Of Removable Media .....	30
2.10.7 Protection From Buffer Overflows .....	30
2.10.8 External File System Mount Restrictions.....	30
2.10.9 File-System Authorization Privileges.....	30
2.10.10 Syn Flood Prevention.....	31
2.10.11 Handling Of Ip Options And Extensions .....	31
2.10.12 Restrictions On Running Scripts / Batch-Processes .....	31
2.10.13 Restrictions On Soft-Restart.....	31
Section 2.11: Web Servers .....	31
2.11.1 Https .....	31
2.11.2 Webserver Logging.....	32
2.11.3 Https Input Validation.....	32
2.11.4 No System Privileges.....	32
2.11.5 No Unused Https Methods.....	32
2.11.6 No Unused Add-Ons .....	32
2.11.7 No Compiler, Interpreter, Or Shell Via Cgi Or Other Server-Side Scripting.....	33
2.11.8 No Cgi Or Other Scripting For Uploads.....	33
2.11.9 No Execution Of System Commands With Ssi .....	33

2.11.10 Access Rights For Web Server Configuration .....	33
2.11.11 No Default Content.....	33
2.11.12 No Directory Listings .....	33
2.11.13 Web Server Information In Https Headers.....	33
2.11.14 Web Server Information In Error Pages.....	34
2.11.15 Minimized File Type Mappings .....	34
2.11.16 Restricted File Access .....	34
2.11.17 Execute Rights Exclusive For Cgi/Scripting Directory.....	34
2.11.18 Http User Session.....	34
Section 12: General Sba/Sbi Aspects.....	35
2.12.1 No Code Execution Or Inclusion Of External Resources By Json Parsers.....	35
2.12.2 Validation Of The Unique Key Values In Ies.....	35
2.12.3 Validation Of The Ies Limits .....	35
2.12.4 Protection At The Transport Layer .....	36
2.12.5 Authorization Token Verification Failure Handling Within One Plmn .....	36
2.12.6 Authorization Token Verification Failure Handling In Different Plmns.....	37
Section 13: Other Security Requirement .....	37
2.13.1 Remote Diagnostic Procedure – Verification .....	37
2.13.2 No System Password Recovery.....	37
2.13.3 Secure System Software Revocation.....	37
2.13.4 Software Integrity Check –Installation .....	37
2.13.5 Software Integrity Check – Boot.....	38
2.13.6 Unused Physical And Logical Interfaces Disabling .....	38
2.13.7 No Default Profile.....	38
Chapter 3 – Specific Security Requirements .....	39
Section 3.1: Event Exposure Service.....	39
3.1.1 Event Exposure Service Api Authorization.....	39
3.1.2 Event Exposure Service Api Authorization When Multiple Nrfs Deployed In The Network.....	39
Section 3.2: Secure Communication In Case Of Co-Existence Of Eps And 5gc .....	39
3.2.1 Integrity Protection Of Af-Nef Interface.....	39
3.2.2 Confidentiality Protection Of Af-Nef Interface .....	39
3.2.3 Replay Protection Of Af-Nef Interface .....	39
3.2.4 Mutual Authentication Of Af And Nef When Nef Supports Capif For External Exposure.....	40
Annexure-I.....	41
Annexure-II .....	44
Annexure-III.....	48
Annexure-IV .....	49

## **A) Outline**

The objective of this document is to present a comprehensive, country-specific security requirements for the Application Function (AF) of 5G Core network. The AF is primarily responsible for influence on traffic routing, interacting with policy framework for policy control, interactions with IMS and accessing network exposure function. AF can be accessed directly by other network functions or via Network Exposure function in case of AF is outside the 5G Core network.

The specifications produced by various regional/international standardization bodies/organizations/ associations like 3GPP, ITU-T, ISO, ETSI, IEEE, TIP, IETF, TSDSI along with the country-specific security requirements are the basis for this document. The TEC/TSDSI references made in this document implies that the respective clause has been adopted as it is or with certain modifications.

This document commences with a brief description of 5G system architecture, AF and its functionalities and then proceeds to address the common and AF specific security requirements.

## **B) Scope**

This document targets on the security requirements of the AF, 5G Core network function as defined by the 3GPP. This document does not cover the security requirements at the virtualisation and infrastructure layer. The requirements specified here are binding both on operators TSPs (Telecommunication Service Provider) and network equipment providers OEMs (Original Equipment Manufacturer).

## **C) Conventions**

1. Must or shall or required denotes the absolute requirement of a particular clause of ITSAR.
2. Must not or shall not denote absolute prohibition of a particular clause of ITSAR.
3. Should or recommended denotes that the clause of ITSAR may be ignored under justifiable circumstances but after careful examination of its implications.
4. Shall not or not Recommended denotes the opposite meaning of (3) above.

# Chapter 1 – Overview

**Introduction:** The fifth generation of mobile technologies - 5G - is expected to connect people, things, data, applications, transport systems and cities in a smart networked communication environment. 5G is standardized by the 3rd Generation Partnership Project (3GPP) and the requirement framework for 5G are specified by ITU under IMT-2020. The usage scenario/use cases identified for 5G are i) enhanced Mobile Broadband (eMBB) ii) massive Machine Type Communication (mMTC) and iii) Ultra Reliable and Low Latency Communications (URLLC).

**5G Architecture:** The generic 5G system (5GS) architecture consists of User Equipment, Radio Access Network (RAN) supporting New Radio (NR) and the cloud native 5G Core networks (CN). 5G Base station is called as Next Generation Node B (gNB). The deployment strategies possible are Stand Alone (SA) and Non-Stand Alone (NSA). In SA mode, 5G NR connects to 5G CN and in NSA mode, 5G NR connects to 4G network.

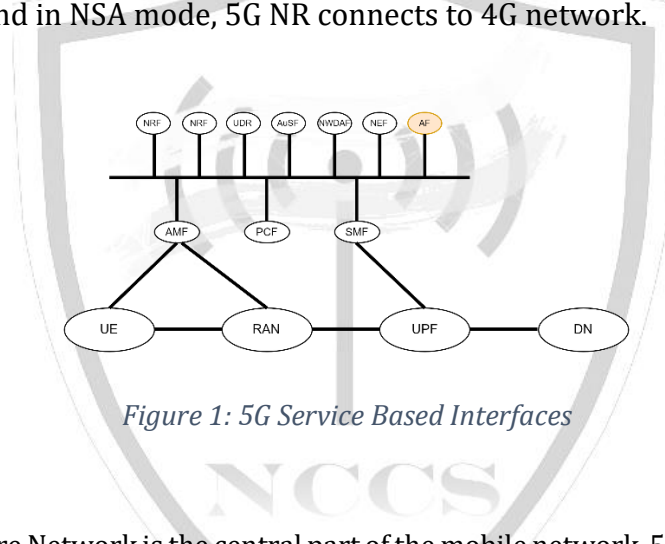


Figure 1: 5G Service Based Interfaces

**5G Core Network:** Core Network is the central part of the mobile network. 5G core network provides authentication, security, mobility management, session management and subscriber management services. These functionalities are supported by the set of core network functions. Some of the important core network functions are AMF, AF, AuSF, UDM, UDR, SMF, UPF, NRF, NEF, NSSF, and PCF. The salient features of the 5G Core Network are as follows.

1. Service Based Architecture
2. Separation of user plane and control plane.
3. Secure Access, Authentication and Authorisation
4. Seamless mobility management within 3GPP and non 3GPP network.
5. Network function virtualisation and Software Defined Network
6. Network Slicing and management
7. Policy Control and various QoS support.
8. Secure exposure of network functions to external to 3GPP network.

In an SBA framework, the individual elements are defined as Network Functions instead of network entities. Each Network Function acts as a producer and a consumer and interact through Service Based Interface. RESTful APIs are used in 5G SBA which uses HTTP/2 as application layer protocol.




**Application Function (AF):** The Application Function, supports the following functionality.

- Application influence on traffic routing.
- Accessing Network Exposure Function
- Interacting with Policy framework for policy control
- IMS interactions with 5G Core Network.

The AF provides following services in the 5G core network.

- Application function event exposure service defined in 3GPP TS 29.517

The AF service architecture as per the 3GPP.

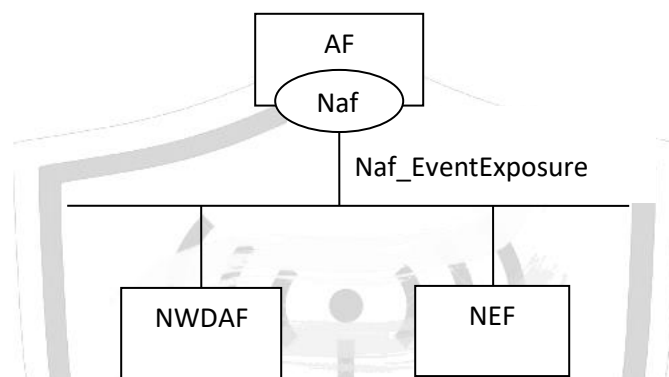

*Figure 2: AF Service Architecture*

**AF Security:** TLS shall be used to support the security communication between the NF service consumer and the AF as defined in 3GPP 33.501 clause 12.3 and 13.1. The interfaces through which the services offered needs to be secured, AF interfaces with NEF and NWDAF. In this document, requirement to secure these API will be discussed along with common security requirements from 3GPP 33.117 which is applicable to any software or network product component and 5G security requirements for AF from 3GPP 33.501.

*Securing Networks*

## **Chapter 2 – COMMON SECURITY REQUIREMENTS**

---

### **Section 2.1: Access and Authorization**

---

#### **2.1.1 Management Protocols Mutual Authentication**

Requirement:

The AF network function shall support mutual authentication mechanisms, the mutual authentication mechanism can rely on the protocol used for the interface itself or other means.

Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls for Indian Telecom Security Assurance Requirements (ITSAR)” shall only be used for AF management and maintenance.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.4.1]

---

#### **2.1.2 Management Traffic Protection**

Requirement:

AF management traffic shall be protected strictly using secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls For Indian Telecom Security Assurance Requirements (ITSAR)” only.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.2.4]

---

#### **2.1.3 Role-based access control policy**

Requirement:

AF shall support Role-Based Access Control (RBAC). A role-based access control system uses a set of controls that determines how users interact with domains and resources. The RBAC system controls how users or groups of users are allowed access to the various domains and what type of operation they can perform, i.e., the specific operation command or command group (e.g View, Modify, Execute). AF supports RBAC with minimum of 3 user roles for OAM privilege management for AF management and maintenance, including authorization of the operation for configuration data and software via the network product console interface.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.6.2]

Note: The reference to Console interface may not be applicable here for GVNP Models of Type 1& 2

---

#### **2.1.4. User Authentication – Local/Remote**

Requirement:

The various user and machine accounts on a system shall be protected from misuse. To this end, an authentication attribute is typically used, which, when combined with the username, enables unambiguous authentication and identification of the authorized user.

Authentication attributes includes.

- Cryptographic keys
- Token
- Passwords

This means that authentication based on a parameter that can be spoofed is not permitted. Exceptions are attributes that cannot be faked or spoofed by an attacker.

Minimum two of the above Authentication attributes shall be mandatorily combined for protecting all the accounts from misuse. An exception to this requirement is local access and machine accounts where at least one authentication attribute shall be supported.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.2.1]  
Note: Local interface may not be applicable here for GVNP Models of Type 1& 2

---

### **2.1.5 Remote login restrictions for privileged users**

Requirement:

Direct Login to AF as root or equivalent highest privileged user shall be limited to the system console only. Root user will not be allowed to login to AF remotely.

This remote root user access restriction is also applicable to application software's / tools. such as TeamViewer, desktop sharing which provide remote access to the AF.

Note: This clause may not be applicable to GVNP type-1

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.3.2.6]

---

### **2.1.6 Authorization Policy**

Requirement:

The authorizations for accounts and applications shall be reduced to the minimum required for the tasks they have to perform. Authorizations to a system shall be restricted to a level in which a user can only access data and use functions that he needs in the course of his work. Suitable authorizations shall also be assigned for access to files that are components of the operating system or of applications or that are generated by the same (e.g. configuration and logging files). Alongside access to data, execution of applications and components shall also take place with rights that are as low as possible. Applications shall not be executed with administrator or system rights.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.6.1]

---

### **2.1.7 Unambiguous identification of the user & group accounts removal**

Requirement:

Users shall be identified unambiguously by the AF.

AF shall support the assignment of individual accounts per user, where a user could be a person, or, for Machine Accounts, an application, or a system.

AF shall not enable the use of group accounts or group credentials, or sharing of the same account between several users.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.1.2]

---

## **Section 2.2: Authentication Attribute Management**

---

### **2.2.1 Authentication Policy**

Requirement:

The usage of a system function without successful authentication on basis of the user identity and at least two authentication attributes (e.g. password, certificate) shall be prevented. For machine accounts and local access one authentication attribute will be sufficient. System

functions comprise, for example network services (like SSH, SFTP, Web services), local access via a management console, local usage of operating system and applications. This requirement shall also be applied to accounts that are only used for communication between systems.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.1.1]

Note: The reference to 'Local access' and 'Console' may not be applicable here for GVNP Models of Type 1& 2

---

### **2.2.2 Authentication Support - External**

Requirement:

If the AF supports external authentication mechanism such as AAA server (for authentication, authorisation and accounting services), then the communication between AF and the external authentication entity shall be protected using the authentication and related service protocols built strictly using the Secure cryptographic controls prescribed in Table 1 of the latest document "Cryptographic Controls For Indian Telecom Security Assurance Requirements ( ITSAR )" only.

---

### **2.2.3 Protection against brute force and dictionary attacks**

Requirement:

A protection against brute force and dictionary attacks that hinder authentication attribute guessing shall be implemented in AF.

Brute force and dictionary attacks aim to use automated guessing to ascertain authentication attribute for user and machine accounts.

Various measures or a combination of the following measures can be taken to prevent this:

- a) Using the timer delay (this delay could be the same or increased depending the operator's policy for each attempt) for each newly entered password input following an incorrect entry ("tar pit").
- b) Blocking an account following a specified number of incorrect attempts. However, it has to be taken into account that this solution needs a process for unlocking and an attacker can force this to deactivate accounts and make them unusable.
- c) Using an authentication attribute blacklist to prevent vulnerable passwords.
- d) Using CAPTCHA to prevent automated attempts (often used for Web applications).

In order to achieve higher security, two or more of the measures indicated above shall be mandatorily supported by AF. An exception to this requirement is machine accounts.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.3.3]

---

### **2.2.4 Enforce Strong Password**

Requirement:

a) The configuration setting shall be such that AF shall only accept passwords that comply with the following complexity criteria:

i) Absolute minimum length of 8 characters (shorter lengths shall be rejected by the AF). It shall not be possible setting this absolute minimum length to a lower value by configuration.

ii) Password shall mandatorily comprise all the following four categories of characters:

- at least 1 uppercase character (A-Z)

- at least 1 lowercase character (a-z)
- at least 1 digit (0-9)
- at least 1 special character (e.g. @;!\$.)

b) The minimum length of characters in the passwords and the set of allowable special characters shall be configurable by the operator. The special characters may be categorized in sets according to their Unicode category.

c) If a central system is used for user authentication password policy, then additional assurance shall be provided that the central system enforces the same password complexity rules as laid down for the local system in this sub-clause.

d) If a central system is not used for user authentication, the assurance on password complexity rules shall be performed on the AF.

e) When a user is changing a password or entering a new password, AF /central system checks and ensures that it meets the password requirements. Above requirements shall be applicable for all passwords used (e.g. application-level, OS-level, etc.).

Password shall not be stored in clear text in the system; passwords shall be salted and hashed.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.3.1]

### **2.2.5 Inactive Session timeout**

Requirement:

An OAM user interactive session shall be terminated automatically after a specified period of inactivity. It shall be possible to configure an inactivity time-out period.

AF shall monitor inactive sessions of administrative login users and initiate session locking mechanism based on user configurable timers. Unlocking the session shall be permissible only by authentication. If the inactivity period further continues for a defined period, Session /user ID time out must occur after this inactivity. The timer values can be admin configurable as per requirement, normally set between 2 to 5 minutes.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.5.2]

### **2.2.6 Password Changes**

Requirement:

If a password is used as an authentication attribute, then the system shall offer a function that enables a user to change his password at any time. When an external centralized system for user authentication is used, it should be possible to implement this function on this system.

Password change shall be enforced after initial login after successful authentication.

AF shall enforce password change based on password management policy.

In particular, the system shall enforce password expiry. AF shall support a configurable period for expiry of passwords.

Previously used passwords shall not be allowed up to a certain number (Password History).

The number of disallowed previously used passwords shall be:

- Configurable;
- Greater than 0;

- And its minimum value shall be 3. This means that the AF shall store at least the three previously set passwords. The maximum number of passwords that the AF can store for each user is up to the manufacturer.

When a password is about to expire, a password expiry notification shall be provided to the user.

Above requirements shall be applicable for all passwords used (e.g., application-level, OS-level, etc.). An exception to this requirement is machine accounts.

AF to have in-built mechanism to support this requirement.

If a central system is used for user authentication password policy, then additional assurance shall be provided that the central system enforces the same password change policies as laid down for the local system in this subclause.

And if a central system is not used for user authentication, the assurance on password changes rules shall be performed on the AF.

The minimum password age shall be set as one day i.e recycling or flipping of password to immediate return to favourite password in not possible.

The password shall be changed (need not be automatic) based on key events including, not limited to

- Indication of compromise (IoC)
- Change of user roles
- When a user leaves the organization.

[Reference:

1. TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.3.2
2. CIS password policy Guide]

---

### **2.2.7 Protected Authentication feedback**

Requirement:

The Authentication attribute shall not be displayed in such a way that it could be seen and misused by a casual local observer. Typically, the individual characters of the password are replaced by a character such as "\*".

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.3.4]

---

### **2.2.8 Removal of predefined or default authentication attributes**

Requirement:

Predefined or default authentication attributes shall be deleted or disabled.

Normally, authentication attributes such as password or cryptographic keys will be preconfigured from

producer, OEM or developer of a system. Such authentication attributes shall be changed by automatically forcing a user to change it on 1<sup>st</sup> time login to the system or the OEM provides instructions on how to manually change it.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.2.3]

### **2.2.9 Logout function**

Requirement:

The system shall have a function that allows a signed-in user to logout at any time. All processes under the logged-in user ID shall be terminated on logout. The network product shall be able to continue to operate without interactive sessions.

Only for debugging purposes, processes under a logged-in user ID may be allowed to continue to run after detaching the interactive session.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.5.1]

### **2.2.10 Policy regarding consecutive failed login attempts**

Requirement:

- a) The maximum permissible number of consecutive failed user account login attempts should be configurable by the operator. The definition of the default value set at manufacturing time for the maximum number of failed user account login attempts shall be less than or equal to 8, typically 5. After the maximum permissible number of consecutive failed user account login attempts is exceeded by a user, there shall be a block delay in allowing the user to attempt login again. This block delay and the capability to set the period of the block delay, e.g., double the delay, or 5 minutes delay, or 10 minutes delay, after each login failure should be configurable by the operator. The default value set at manufacturing time for this delay shall be greater than or equal to 5 sec.
- b) If supported, infinite (permanent) locking of an account that has exceeded the maximum permissible number of consecutive failed user account login attempts shall also be possible via configuration, with the exception of administrative accounts, which shall get only temporarily locked.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.4.5]

### **2.2.11 Suspend accounts on non-use**

It shall be possible for the system to automatically suspend on account after 'X' days without a valid login.

Note: X may be specified by operator, It can be implemented centrally also.

[Reference: CIS Password Policy Guide]

---

## **Section 2.3: Software Security**

### **2.3.1 Secure Update**

Requirement:

- a) Software package integrity shall be validated during software update stage.

- b) AF shall support software package integrity validation via cryptographic means, e.g. digital signature using Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls For Indian Telecom Security Assurance Requirements (ITSAR)” only. To this end, the network product has a list of public keys or certificates of authorised software sources, and uses the keys to verify that the software update is originated from only these sources.
- c) Tampered software shall not be executed or installed if integrity check fails.
- d) A security mechanism is required to guarantee that only authorized individuals can initiate and deploy a software update, and modify the list mentioned in b above.

Note: Code signing (valid and not time expired) is also allowed as an option in bullet b. [Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.3.5]

### **2.3.2 Secure Upgrade**

Requirement:

- a) Software package integrity shall be validated during software upgrade stage.
- b) AF shall support software package integrity validation via cryptographic means, e.g. digital signature code signing certificate (valid and not time expired) and using Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls For Indian Telecom Security Assurance Requirements (ITSAR)” only. To this end, the network product has a list of public keys or certificates of authorised software sources, and uses the keys to verify that the software update is originated from only these sources.
- c) Tampered software shall not be executed or installed if integrity check fails.
- d) A security mechanism is required to guarantee that only authorized individuals can initiate and deploy a software upgrade, and modify the list mentioned in bullet b.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.3.5]

### **2.3.3 Source code security assurance**

Requirement:

- a) OEM shall follow best security practices including secure coding for software development. Source code shall be made available either at TSTL premises or at the mutually agreed location for source code review by the designated TSTL. It may be supported by furnishing the Software Test Document (STD).
- b) Also, OEM shall submit the undertaking as below:
  - (i) Industry standard best practices of secure coding have been followed during the entire software development life cycle of the AF Software which includes OEM developed code, third party software and opensource code libraries used/embedded in the AF.
  - (ii) AF software shall be free from CWE top 25, OWASP top 10 security vulnerabilities and OWASP top 10 API Security vulnerabilities as on the date of latest release of product or three months prior to the date of offer of product for testing, whichever is latest. For security weaknesses, vulnerabilities identified or discovered during the interim period, OEM shall give mitigation plan.



- (iii) The binaries for AF and upgrades/updates thereafter generated from the source code are free from all known security vulnerabilities stated in (ii) above.

Note: Code signing (valid and not time expired) also allowed.

---

#### **2.3.4 Known Malware and backdoor Check**

Requirement:

OEM shall submit an undertaking stating that AF is free from all known malware and backdoors as on the date of offer of AF to designated TSTL for testing and shall submit their internal Malware Test Document (MTD) of the AF to the designated TSTL.

---

#### **2.3.5 No unused software**

Requirement:

Software components or parts of software which are not needed for operation or functionality of the AF shall not be present/configured.

Orphaned software components /packages shall not be present in AF.

OEM shall provide the list of software that are necessary for AF's operation.

In addition, OEM shall furnish an undertaking as "AF does not contain Software that is not used in the functionality of AF."

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.3.2.3]

---

#### **2.3.6 Unnecessary Services Removal**

Requirement:

AF shall only run protocol handlers and services which are needed for its operation and which do not have any known security vulnerabilities. By default, all other ports and services will be permanently disabled. AF Shall not support following services:

- FTP
- TFTP
- Telnet
- rlogin, RCP, RSH
- HTTP
- SNMPv1 and v2
- SSHv1
- TCP/UDP Small Servers (Echo, Chargen, Discard and Daytime)
- Finger
- BOOTP server

- Discovery protocols (CDP, LLDP)
- IP Identification Service (Identd)
- PAD
- MOP

Any other protocols, services that are vulnerable are also to be permanently disabled. Full documentation of required protocols and services (communication matrix) of the AF and their purpose needs to be provided by the OEM as prerequisite for the test case.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.3.2.1]

---

### **2.3.7 Restricting System Boot Source**

Requirement:

The AF can boot only from the memory devices intended for this purpose.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section- 4.2.3.3.2]

Note: This may not be applicable here for GVNP Models of Type 1& 2.

---

### **2.3.8 Secure Time Synchronization**

Requirement:

AF shall establish a secure communication channel with the Network Time Protocol (NTP) / Precision Time Protocol (PTP) server as per appropriate TEC ER (Essential Requirement) document.

AF shall establish secure communication channel strictly using Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls for Indian Telecom Security Assurance Requirements (ITSAR)” with NTP/PTP server.

AF shall generate audit logs for all changes to time settings.

Note: RFC 8915 which proposes Network Time Security (NTS) as an extension field for the NTP version 4 is also permitted. *Securing Networks*

---

### **2.3.9 Restricted reachability of services**

Requirement:

The AF shall restrict the reachability of services such that they can be reached only on interfaces meant for the purpose. On interfaces where services are active, the reachability should be limited to legitimate communication peers.

Administrative services (e.g., SSH, HTTPS, RDP) shall be restricted to interfaces in the management plane for separation of management traffic from user traffic.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.3.2.2]

---

### 2.3.10 Self Testing

Requirement:

The AF's cryptographic module shall perform power-up self-tests and conditional self-tests to ensure that the module is functioning properly. Power-up self-tests shall be performed when the cryptographic module is powered up. Conditional self-tests shall be performed when an applicable security function or operation is invoked (i.e., security functions for which self-tests are required). If a cryptographic module fails a self-test, the module shall enter an error state and output an error indicator via the status output interface.

The cryptographic module shall not perform any cryptographic operations while in an error state. In case cryptographic module remains in error state, the network functions shall not carry out any operations.

---

## Section 2.4: System Secure Execution Environment

---

### 2.4.1 No unused functions

Requirement:

Unused functions i.e., the software and hardware functions which are not needed for operation or functionality of the AF shall be deactivated in the AF's software and/or hardware. Permanently means that they shall not be reactivated again after the AF system's reboot. If unused functions of software cannot be deleted or uninstalled individually as required in clause "2.3.5 No unused software" of the present document, such function shall be deactivated in the configuration of AF permanently.

The list of hardware and software functions installed in the system shall match with the ones that have been mentioned and deemed necessary for the operation of the AF.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.3.2.4]

Note: The reference to hardware may not be applicable here for GVNP Models of Type 1& 2.

---

### 2.4.2 No unsupported components

Requirement:

OEM to ensure that the AF shall not contain software and hardware components that are no longer supported by them or their 3rd Parties including the opensource communities, such as components that have reached end-of-life or end-of-support. An undertaking in this regard shall be given by OEM.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.3.2.5]

Note: The reference to hardware may not be applicable here for GVNP Models of Type 1& 2.

---

### 2.4.3 Avoidance of Unspecified mode of Access

Requirement

AF shall not contain any wireless access mechanism which is unspecified or not declared. An undertaking shall be given by the OEM as follows:

"The AF does not contain any wireless, optical, magnetic or any other component that may be used as a covert channel."

---

## Section 2.5: User Audit

---

### 2.5.1 Audit trail storage and protection

Requirement:

The security event log shall be access controlled (file access rights) so only privileged users have access to the log files.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.6.3]

---

### 2.5.2 Audit Event Generation

Requirement:

The AF shall log all important Security events with unique System Reference details as given in the Table below.

AF shall record within each audit record at least information pertaining to date and time of the event, type of event, subject identity, and the outcome (success or failure) of the event. Additional audit record information, depending on the audit event, shall also be provided as given in the Table below.

SI No	Event Types (Mandatory or optional)	Description	Event data to be logged
1	Incorrect login attempts (Mandatory)	Records any user incorrect login attempts to the AF.	Username
			Source (IP address) if remote access
			Outcome of event (Success or failure)
			Timestamp
2	Administrator access (Mandatory)	Records any access attempts to accounts that have system privileges.	Username,
			Timestamp,
			Length of session
			Outcome of event (Success or failure)
3	Account administration (Mandatory)	Records all account administration activity, i.e., configure, delete, copy, enable, and disable.	Source (IP address) if remote access
			Administrator username,
			Administered account,
			Activity performed (configure, delete, enable and disable)
			Outcome of event (Success or failure)
Timestamp			
4	Resource Usage (Mandatory)	Records events that have been triggered when	Value exceeded,
			Value reached

		system parameter values such as disk space, CPU load over a longer period have exceeded their defined thresholds.	(Here suitable threshold values shall be defined depending on the individual system.)
			Outcome of event (Threshold Exceeded)
			Timestamp
5	Configuration change (Mandatory)	Changes to configuration of the network device	Change made
			Timestamp
			Outcome of event (Success or failure)
			Username
6	Reboot/shutdown/crash (Mandatory)	This event records any action on the network device/AF that forces a reboot or shutdown OR where the network device/AF has crashed.	Action performed (boot, reboot, shutdown, etc.)
			Username (for intentional actions)
			Outcome of event (Success or failure)
			Timestamp
7	Interface status change (Mandatory)	Change to the status of interfaces on the network device/AF (e.g., shutdown)	Interface name and type
			Status (shutdown, down missing link, etc.)
			Outcome of event (Success or failure)
			Timestamp
8	Change of group membership or accounts (Optional)	Any change of group membership for accounts	Administrator username,
			Administered account,
			Activity performed (group added or removed)
			Outcome of event (Success or failure)
			Timestamp.
9	Resetting Passwords (Optional)	Resetting of user account passwords by the Administrator	Administrator username
			Administered account
			Activity performed (configure, delete, enable and disable)
			Outcome of event (Success or failure)
			Timestamp
10	Services (Optional)	Starting and Stopping of Services (if applicable)	Service identity
			Activity performed (start, stop, etc.)
			Timestamp

			Outcome of event (Success or failure)
11	X.509 Certificate Validation (Optional)	Unsuccessful attempt to validate a certificate	Timestamp
			Reason for failure
			Subject identity
			Type of event
12	Secure Update (Optional)	Attempt to initiate manual update, initiation of update, completion of update	User identity
			Timestamp
			Outcome of event (Success or failure)
			Activity performed
13	Time change (Mandatory)	Change in time settings	Old value of time
			New value of time
			Timestamp
			origin of attempt to change time (e.g., IP address)
			Subject identity
			Outcome of event (Success or failure)
			User identity
14	Session unlocking/termination (Optional)	Any attempts at unlocking of an interactive session, termination of a remote session by the session locking mechanism, termination of an interactive session.	User identity (wherever applicable)
			Timestamp
			Outcome of event (Success or failure)
			Subject identity
			Activity performed
			Type of event
15	Trusted Communication paths with IT entities such as Authentication Server, Audit Server, NTP Server, etc. and for authorised remote administrators (Optional)	Initiation, Termination and Failure of trusted Communication paths	Timestamp
			Initiator identity (as applicable)
			Target identity (as applicable)
			User identity (in case of Remote administrator access)
			Type of event
			Outcome of event (Success or failure, as applicable)
16	Audit data changes (Optional)	Changes to audit data including deletion of audit data	Timestamp
			Type of event (audit data deletion, audit data modification)
			Outcome of event (Success or failure)
			Subject identity

			User identity
			origin of attempt to change time (e.g., IP address)
			Details of data deleted or modified
17	User Login (Mandatory) and log off	All use of Identification and authentication mechanisms.	User identity
			Origin of attempt (IP address)
			Outcome of event (Success or failure)
			Timestamp

[Reference: TEC 25848:2022/TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.6.1]

### 2.5.3 Secure Log Export

Requirement:

- a) The AF shall support (near real time) forwarding of security event logging data to an external system available in redundant configuration by push or pull mechanism through diverse links.
- b) Log functions shall support secure uploading of log files to a central location or to a system external for the AF.
- c) AF shall be able to store the generated audit data locally. The memory for this purpose shall be dimensioned to cater for the continuous storage of two days of audit data. OEM shall submit justification document for sufficiency of local storage requirement.
- d) Secure Log export shall comply the secure cryptographic controls prescribed in Table 1 of the latest document "Cryptographic Controls for Indian Telecom Security Assurance Requirements (ITSAR)" only.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.6.2]

### 2.5.4 Logging access to personal data

Requirement:

In some cases, access to personal data in a clear text might be required. If such access is required, access to this data shall be logged, and the log shall contain who accessed what data without revealing personal data in clear text. When for practical purposes, such logging is not available, a coarser grain logging is allowed. In some cases, the personal data stored in the log files may allow the direct identification of a subscriber. In such cases, the revealed personal information may not expose the subscriber to any kind of privacy violation.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.2.5]

## Section 2.6: Data Protection

### 2.6.1 Cryptographic Based Secure Communication

Requirement:

AF shall Communicate with the connected entities strictly using the secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls For Indian Telecom Security Assurance Requirements (ITSAR)” only.

With each entity with details of interface, protocol stack implemented, configuration, detailed procedure of establishing the communication with each entity and any other details required for verifying this requirement.

---

### **2.6.2 Cryptographic Module Security Assurance**

Requirement:

Cryptographic module embedded inside the AF (in the form of hardware, software or firmware) that provides all the necessary security services such as authentication, integrity, and confidentiality is designed and implemented in compliance with FIPS 140-2 or later as prescribed by NIST standards.

Till further instructions, this clause will be considered ‘complied’ by submission of an undertaking by the OEM in specified format.

An undertaking is to be submitted by the OEM mentioning that “Cryptographic module embedded inside the AF (in the form of hardware, software or firmware) that provides all the necessary security services such as authentication, integrity and confidentiality is designed and implemented in compliance with FIPS 140-2 or later as prescribed by NIST standards.”

[Ref [8]: <https://nvlpubs.nist.gov/nistpubs/FIPS/NIST.FIPS.140-2.pdf>.

Ref [ 50]: ENISA Recommendation “Standardization in support of the cybersecurity certification”, Dec 2019.]

---

### **2.6.3. Cryptographic Algorithms implementation Security Assurance**

Requirement:

Cryptographic algorithm implemented inside the Crypto module of AF shall be in compliance with the respective latest FIPS standards (for the specific crypto algorithm).

Till further instructions, this clause will be considered ‘complied’ by submission of an undertaking by the OEM in specified format.

An undertaking is to be submitted by the OEM mentioning that “Cryptographic algorithms implemented inside the Crypto module of AF is in compliance with the respective latest FIPS standards (for the specific crypto algorithm embedded inside the AF).”

---

### **2.6.4. Protecting data and information – Confidential System Internal Data**

Requirement:

a) When AF is in normal operational mode (i.e., not in maintenance mode) there shall be no system function that reveals confidential system internal data in the clear text to users and administrators.

b) Access to maintenance mode shall be restricted only to authorised privileged user.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.2.2.]

---



## 2.6.5. Protecting data and information in storage

Requirement:

a) For sensitive data (persistent or temporary) in storage, read access rights shall be restricted. Sensitive files of AF system that are needed for the functionality shall be protected against manipulation strictly using the Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls For Indian Telecom Security Assurance Requirements (ITSAR)” with appropriate non-repudiation controls.

b) In addition, the following rules apply for:

i) Systems that need access to identification and authentication data in the clear/readable form e.g., in order to perform an authentication. Such systems shall not store this data in the clear/readable form, but scramble or encrypt it by implementation-specific means.

ii) Systems that do not need access to sensitive data in the clear. Such systems shall hash this sensitive data strictly using the cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls for Indian Telecom Security Assurance Requirements (ITSAR)” only.

iii) Stored files in the AF: Shall be protected against manipulation strictly using the NCCS approved Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls For Indian Telecom Security Assurance Requirements (ITSAR)” only.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.2.3]

---

## 2.6.6 Protection against Copy of Data

Requirement:

a) Without authentication & authorization and except for specified purposes, AF shall not support copying of control plane and user plane data.

b) Protective measures should exist against use of available system functions / software residing in AF to create copy of control plane and user plane data for illegal transmission.

---

## 2.6.7 Protection against Data Exfiltration - Overt Channel

Requirement

(a) AF shall have m

(b) Mechanisms to prevent data exfiltration attacks for theft of control plane and user plane data in use and data in transit.

(c) Establishment of outbound overt channels such as, HTTPS, IM, P2P, Email etc. are to be forbidden if they are auto-initiated by / auto-originated from the AF.

(d) Session logs shall be generated for establishment of any session initiated by either user or AF.

---

## 2. 6.8 Protection against Data Exfiltration - Covert Channel

Requirement:

a) AF shall have mechanisms to prevent data exfiltration attacks for theft of control plane and user plane data in use and data in transit.

- b) Establishment of outbound covert channels and tunnels such as DNS Tunnel, HTTPS Tunnel, ICMP Tunnel, TLS, SSL, SSH, IPSEC VPN, RTP Encapsulation etc. are to be forbidden if they are auto-initiated by / auto-originated from the AF.
- c) Session logs shall be generated for establishment of any session initiated by either user or AF system.

---

## **Section 2.7: Network Services**

---

### **2.7.1 Traffic Filtering – Network Level Requirement**

Requirement:

AF shall provide a mechanism to filter incoming IP packets on any IP interface. In particular the AF shall provide a mechanism:

a) To filter incoming IP packets on any IP interface at Network Layer and Transport Layer of the stack ISO/OSI.

b) To allow specified actions to be taken when a filter rule matches. In particular at least the following actions should be supported:

- Discard/Drop: the matching message is discarded; no subsequent rules are applied and no answer is sent back.
- Accept: the matching message is accepted.
- Account: the matching message is accounted for i.e., a counter for the rule is incremented. This action can be combined with the previous ones.

This feature is useful to monitor traffic before its blocking.

c) To enable/disable for each rule the logging for Dropped packets, i.e., details on messages matching the rule for troubleshooting.

d) To filter on the basis of the value(s) of source IP, destination IP and port addresses of protocol header.

e) To reset the accounting.

f) The AF shall provide a mechanism to disable/enable each defined rule.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.6.2.1]

---

### **2.7.2 Traffic Separation**

Requirement:

The AF shall support the physical or logical separation of traffic belonging to different network domains. For example, O&M traffic and control plane traffic belong to different network domains. See RFC 3871 for further information.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.5.1].

---

### **2.7.3 Traffic Protection –Anti-Spoofing**

Requirement:

AF shall not process IP Packets if their source address is not reachable via the incoming interface. Implementation example: Use of "Reverse Path Filter" (RPF) provides this function.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.3.1.1]

---

## **Section 2.8: Attack Prevention Mechanisms**

### **2.8.1 Network Level and application-level DDoS**

Requirement:

AF shall have protection mechanism against Network level and Application-level DDoS attack.

AF shall provide security measures to deal with overload situations which may occur as a result of a denial-of-service attack or during periods of increased traffic. In particular, partial or complete impairment of system availability shall be avoided.

For example, potential protective measures may include:

- Restricting of available RAM per application
- Restricting of maximum sessions for a Web application
- Defining the maximum size of a dataset
- Restricting CPU resources per process
  
- Prioritizing processes
- Limiting of amount or size of transactions of an user or from an IP address in a specific time range
- Limiting of amount or size of transactions to an IP address/Port Address in a specific time range

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.3.1]

---

### **2.8.2 Excessive Overload Protection**

Requirement:

AF shall act in a predictable way if an overload situation cannot be prevented. AF shall be built in this way that it can react on an overload situation in a controlled way.

However, it is possible that a situation happens where the security measures are no longer sufficient. In such case it shall be ensured that AF cannot reach an undefined and thus potentially insecure, state.

OEM shall provide a technical description of the AF's Over Load Control mechanisms. (especially whether these mechanisms rely on cooperation of other network elements e.g., RAN)

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.3.3.3]

### **2.8.3 Manipulated packets that are sent to an address of the network device shall not lead to an impairment of availability.**

Requirement:

AF shall not be affected in its availability or robustness by incoming packets from other network elements that are manipulated or differing the norm. This means that appropriate packets shall be detected as invalid and be discarded. The process shall not be affecting the performance of the AF. This robustness shall be just as effective for a great mass of invalid packets as for individual or a small number of packets.

Examples of such packets are:

- Mass-produced TCP packets with a set SYN flag to produce half-open TCP connections (SYN flooding attack).
- Packets with the same IP sender address and IP recipient address (Land attack).
- Mass-produced ICMP packets with the broadcast address of a network as target address (Smurf attack).
- Fragmented IP packets with overlapping offset fields (Teardrop attack).
- ICMP packets that are larger than the maximum permitted size (65,535 Bytes) of IPv4 packets (Ping-of-death attack).
- Uncorrelated reply packets (i.e. packets which cannot be correlated to any request).

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.2.6.2.2]

Note: This clause may not be applicable for GVNP Type 1.

---

## **Section 2.9: Vulnerability Testing Requirements**

---

### **2.9.1 Fuzzing – Network and Application Level**

Requirement:

It shall be ensured that externally reachable services of AF are reasonably robust when receiving unexpected input.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.4.4]

---

### **2.9.2 Port Scanning**

Requirement:

It shall be ensured that on all network interfaces of AF, only documented ports on the transport layer respond to requests from outside the system.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.4.2]

---

### **2.9.3 Vulnerability Scanning**

Requirement:

The vulnerabilities found during the Vulnerability Scanning/Assessment process shall be remediated as below. For other than critical vulnerabilities, OEM shall provide remediation plan.

Sl No	CVSS Score	Severity	Remediation
1	9.0 – 10.0	Critical	To be patched immediately
2	7.0 – 8.9	High	To be patched within a month
3	4.0 – 6.9	Medium	To be patched within three months
4	0.1 – 3.9	Low	To be patched within a year

Zero-day Vulnerability shall be remediated immediately or as soon as possible.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.4.3]

---

## Section 2.10: Operating System

---

### 2.10.1 Growing Content Handling

Requirement:

- a) Growing or dynamic content shall not influence system functions.
- b) A file system that reaches its maximum capacity shall lead to an event getting logged with appropriate message parameters and shall not stop AF from operating properly. Therefore, countermeasures shall be taken to ensure that this scenario is avoided.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.4.1.1.1]

### 2.10.2 Handling of ICMP

Requirement:

Processing of ICMPv4 and ICMPv6 packets which are not required for operation shall be disabled on the AF.

AF shall not send certain ICMP types by default but it may support the option to enable utilization of these types which are marked as "Optional" in below table:

Type (IPv4)	Type (IPv6)	Description	Send	Respond to
0	128	Echo Reply	Optional (i.e., as automatic reply to "Echo Request")	N/A
3	1	Destination Unreachable	Permitted	N/A
8	129	Echo Request	Permitted	Optional
11	3	Time Exceeded	Optional	N/A
12	4	Parameter Problem	Permitted	N/A
N/A	2	Packet too Big	Permitted	N/A

N/A	135	Neighbor Solicitation	Permitted	Permitted
N/A	136	Neighbor Advertisement	Permitted	N/A

AF shall not respond to, or process (i.e., do changes to configuration) under any circumstances certain ICMP message types as marked in the below table.

Type (IPv4)	Type (IPv6)	Description	Send	Respond to	Process (i.e., do changes to configuration)
5	137	Redirect	N/A	N/A	Not Permitted
13	N/A	Timestamp	N/A	Not Permitted	N/A
14	N/A	Timestamp Reply	Not Permitted (i.e., as automatic reply to "Timestamp")	N/A	N/A
N/A	133	Router Solicitation	N/A	Not Permitted	Not Permitted
N/A	134	Router Advertisement	N/A	N/A	Permitted

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Sectio 4.2.4.1.1.2.]

### 2.10.3 Authenticated Privilege Escalation only

Requirement:

AF shall not support a privilege escalation method in interactive sessions (both CLI and GUI) which allows a user to gain administrator/root privileges from another user account without re-authentication.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.4.1.2.1]

### 2.10.4 System account identification

Requirement:

Each system account in AF shall have a unique identification with appropriate non repudiation controls.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.4.2.2]

## **2.10.5 OS Hardening - Minimized kernel network functions**

Requirement:

Kernel-based network functions not needed for the operation of the network element shall be deactivated. In particular, the following ones shall be disabled by default:

1. IP Packet Forwarding between different interfaces of the network product.
2. Proxy ARP
3. Directed broadcast
4. IPv4 Multicast handling
5. Gratuitous ARP messages

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.3.1.2]  
Note: This clause may not be applicable for GVNP Type 1.

---

## **2.10.6 No automatic launch of removable media**

Requirement:

AF shall not automatically launch any application when a removable media device is connected.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.3.1.3]  
Note: This clause may not be applicable for GVNP Type 1 and 2.

---

## **2.10.7 Protection from buffer overflows**

Requirement:

AF shall support mechanisms for buffer overflow protection. Documentation which describes these buffer overflow mechanisms and also how to check that they have been enabled and/or implemented shall be provided by OEM.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.3.1.5]

---

## **2.10.8 External file system mount restrictions**

Requirement:

If normal users are allowed to mount external file systems (attached locally or via the network), OS-level restrictions shall be set properly in AF in order to prevent privilege escalation or extended access permissions due to the contents of the mounted file systems. OS-level restrictions shall apply to normal users against mount / use of removable media devices (e.g. USB drive, CD ROM etc.) for data transfer.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.3.1.6]  
Note: This clause may not be applicable for GVNP Type 1 and 2.

---

## **2.10.9 File-system Authorization privileges**

Requirement:

AF shall be designed to ensure that only users that are authorized to modify files, data, directories, or file systems have the necessary privileges to do so.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.2.7]

---

### **2.10.10 SYN Flood Prevention**

Requirement:

AF shall support a mechanism to prevent Syn Flood attacks. This feature shall be enabled by default.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.3.1.4]

---

### **2.10.11 Handling of IP options and extensions**

Requirement:

IP packets with unnecessary options or extension headers shall not be processed. IP options and extension headers (e.g., source routing) are only required in exceptional cases. So, all packets with enabled IP options or extension headers shall be filtered.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.2.4.1.1.3]

---

### **2.10.12 Restrictions on running Scripts / Batch-processes**

Requirement:

Scheduled tasks for carrying out the activities such as taking the backups, monitoring disk space and system maintenance activities shall be executed by the privileged user such as administrator only. Similarly, AF shall have feature to restrict Scripts / Batch-processes / Macros usage among various users. It shall be possible to administratively configure scheduled tasks usage i.e Cron-Job usage (permit / deny) among various users like Normal users, privileged users.

### **2.10.13 Restrictions on Soft-Restart**

Requirement:

AF shall restrict software-based system restart options usage among various users. The software reset / restart either through command or use of key-combinations like CTRL+ALT+DEL is not available to normal users for prevention of unintended / malicious trigger of system reset / restart.

Note: Hardware based restart may not be applicable for GVNP Type 1 and 2.

---

## **Section 2.11: Web Servers**

---

This entire section of the security requirements is applicable if the AF supports **web management interface**.

### **2.11.1 HTTPS**

Requirement:

The communication between Web client and Web server shall be protected strictly using the Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls For Indian Telecom Security Assurance Requirements (ITSAR)” only.



[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.2.5.1]

---

### **2.11.2 Webserver logging**

Requirement:

Access to the AF webserver (for both successful as well as failed attempts) shall be logged by AF.

The web server log shall contain the following information:

- Access timestamp
- Source (IP address)
- Account (if known)
- Attempted login name (if the associated account does not exist)
- Relevant fields in http request. The URL should be included whenever possible.
- Status code of web server response

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.2.5.2]

---

### **2.11.3 HTTPS input validation**

Requirement:

The AF shall have a mechanism in place to ensure that web application inputs are not vulnerable to command injection or cross-site scripting attacks.

AF shall validate, filter, escape, and encode user-controllable input before it is placed in output that is used as a web page that is served to other users.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.2.5.4]

---

### **2.11.4 No system privileges**

Requirement:

No AF web server processes shall run with system privileges.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.2]

---

### **2.11.5 No unused HTTPS methods**

Requirement:

HTTPS methods that are not required for AF operation shall be deactivated.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.3]

---

### **2.11.6 No unused add-ons**

Requirement:

All optional add-ons and components of the web server shall be deactivated if they are not required for AF operation.

In particular, CGI or other scripting components, Server Side Includes (SSI), and WebDAV shall be deactivated if they are not required.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.4]

---

### **2.11.7 No compiler, interpreter, or shell via CGI or other server-side scripting**

Requirement:

If CGI (Common Gateway Interface) or other scripting technology is used, the CGI directory or other corresponding scripting directory shall not include compilers or interpreters.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.5]

---

### **2.11.8 No CGI or other scripting for uploads**

Requirement:

If CGI or other scripting technology is used, the associated CGI/script directory shall not be used for uploads.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.6]

---

### **2.11.9 No execution of system commands with SSI**

Requirement:

If Server Side Includes (SSI) is active, the execution of system commands shall be deactivated.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.7]

---

### **2.11.10 Access rights for web server configuration**

Requirement:

Access rights for AF web server configuration files shall only be granted to the owner of the web server process or to a user with system privileges.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.8]

---

### **2.11.11 No default content**

Requirement:

Default content that is provided with the standard installation of the AF web server shall be removed.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.9]

---

### **2.11.12 No directory listings**

Requirement:

Directory listings (indexing) / "Directory browsing" shall be deactivated.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.10]

---

### **2.11.13 Web server information in HTTPS headers**

Requirement:

The HTTPS header shall not include information on the version of the AF web server and the modules/add-ons used.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.11]

---

#### **2.11.14 Web server information in error pages**

Requirement:

User-defined error pages and Error messages shall not include version information and other internal information about the AF web server and the modules/add-ons used. Default error pages of the AF web server shall be replaced by error pages defined by the OEM.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.12]

---

#### **2.11.15 Minimized file type mappings**

Requirement:

File type or script-mappings that are not required for AF operation shall be deleted.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.13]

---

#### **2.11.16 Restricted file access**

Requirement:

Restrictive access rights shall be assigned to all files which are directly or indirectly reside in the AF web server's document directory. In particular, the AF web server shall not be able to access files which are not meant to be delivered.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.14]

---

#### **2.11.17 Execute rights exclusive for CGI/Scripting directory**

Requirement:

If CGI or other scripting technology is used, only the CGI/Scripting directory is configured with execute rights. Other directories used or meant for web content do not have execute rights.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.3.4.15]

---

#### **2.11.18 HTTP User session**

Requirement:

*Securing Networks*

To protect user sessions, AF shall support the following session ID and session cookie requirements:

1. The session ID shall uniquely identify the user and distinguish the session from all other active sessions.
2. The session ID shall be unpredictable.
3. The session ID shall not contain sensitive information in clear text (e.g., account number, social security, etc.).
4. In addition to the Session Idle Timeout, AF shall automatically terminate sessions after a configurable maximum lifetime. This maximum lifetime defines the maximum session span. When the maximum lifetime expires, the session shall be closed, the session ID shall be deleted and the user shall be forced to (re)authenticate in the web

application and to establish a new session. The default value for this maximum lifetime shall be set to 8 hours.

5. Session IDs shall be regenerated for each new session (e.g., each time a user logs in).
6. The session ID shall not be reused or renewed in subsequent sessions.
7. The AF shall not use persistent cookies to manage sessions but only session cookies. This means that neither the "expire" nor the "max-age" attribute shall be set in the cookies.
8. Where session cookies are used the attribute 'HTTP Only' shall be set to true.
9. Where session cookies are used the 'domain' attribute shall be set to ensure that the cookie can only be sent to the specified domain.
10. Where session cookies are used the 'path' attribute shall be set to ensure that the cookie can only be sent to the specified directory or sub-directory.
11. The AF shall not accept session identifiers from GET/POST variables.
12. The AF shall be configured to only accept server generated session ID

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. section 4.2.5.3]

---

## **Section 12: General SBA/SBI Aspects**

---

This general baseline requirements are applicable to all Network Function (NF) within the 5G Core (5GC) utilizing Service-Based Interfaces (SBI), independent of a specific network product class.

### **2.12.1 No code execution or inclusion of external resources by JSON parsers**

Requirement:

Parsers used by Network Functions (NF) shall not execute JavaScript or any other code contained in JSON objects received on Service Based Interfaces (SBI). Further, these parsers shall not include any resources external to the received JSON object itself, such as files from the NF's filesystem or other resources loaded externally.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.6.2]

---

### **2.12.2 Validation of the unique key values in IEs**

Requirement:

For data structures where values are accessible using names (sometimes referred to as keys), e.g., a JSON object, the name shall be unique. The occurrence of the same name (or key) twice within such a structure shall be an error and the message shall be rejected.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.6.3]

---

### **2.12.3 Validation of the IEs limits**

Requirement:

The valid format and range of values for each IE, when applicable, shall be defined unambiguously:

- a) For each message the number of leaf IEs shall not exceed 16000.
- b) The maximum size of the JSON body of any HTTP request shall not exceed 16 million bytes.
- c) The maximum nesting depth of leaves shall not exceed 32

[Reference: 1. TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section - 4.3.6.4

---

#### **2.12.4 Protection at the transport layer**

Requirement:

NF Service Request and Response procedure shall support mutual authentication between NF consumer and NF producer. All network functions shall support TLS. Network functions shall support both server-side and client-side certificates.

Authentication between network functions within one PLMN can use the following method:

- If the PLMN uses protection at the transport layer, authentication provided by the transport layer protection solution shall be used for authentication between NFs.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.2.2.2]

Note: This may not be applicable for UPF and N3IWF.

---

#### **2.12.5 Authorization token verification failure handling within one PLMN**

Requirement:

The NF Service producer shall verify the access token as follows:

- The NF Service producer ensures the integrity of the access token by verifying the signature using NRF's public key or checking the MAC value using the shared secret. If integrity check is successful, the NF Service producer shall verify the claims in the access token as follows: - It checks that the audience claim in the access token matches its own identity or the type of NF service producer. If a list of NSSAIs or list of NSI IDs is present, the NF service producer shall check that it serves the corresponding slice(s).
- If an NF Set ID is present, the NF Service Producer shall check the NF Set ID in the claim matches its own NF Set ID.
- If the access token contains "additional scope" information (i.e. allowed resources and allowed actions (service operations) on the resources), it checks that the additional scope matches the requested service operation.
- If scope is present, it checks that the scope matches the requested service operation.
- It checks that the access token has not expired by verifying the expiration time in the access token against the current data/time. If the verification is successful, the NF Service producer shall execute the requested service and respond back to the NF Service consumer. Otherwise, it shall reply based on the Oauth
- 2.0 error response defined in RFC 6749. The NF service consumer may store the received
- token(s). Stored tokens may be re-used for accessing service(s) from producer NF type listed in claims (scope, audience) during their validity time.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.2.2.3.1]  
Note: This may not be applicable for UPF and SEPP.

---

### **2.12.6 Authorization token verification failure handling in different PLMNs**

Requirement:

The NF service producer shall check that the home PLMN ID of the audience claimed in the access token matches its own PLMN identity.

[Reference: TEC 25848:2022 / TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. Section 4.2.2.2.3.2]  
Note: This may be applicable for SEPP.

---

## **Section 13: Other Security requirement**

---

### **2.13.1 Remote Diagnostic Procedure – Verification**

Requirement:

If the AF is providing Remote access for troubleshooting purposes/alarm maintenance then it shall be allowed only for authorized users, other than the root user.

All activities performed by the remote user are to be logged with the following parameters:

1. User id
2. Time stamp
3. Interface type
4. Event type
5. Command/activity performed
6. Result type (e.g., SUCCESS, FAILURE)
7. IP Address of remote machine

---

### **2.13.2 No System Password Recovery**

Requirement:

No provision shall exist for AF System / Root password recovery.

---

### **2.13.3 Secure System Software Revocation**

Requirement:

Once the AF software image is legally updated/upgraded with New Software Image, it shall normally not be possible to roll back to a previous software image. In case roll back is essential, it shall be done by the administrator with appropriate non-repudiation controls. AF shall support a well-established control mechanism for rolling back to previous software image.

---

### **2.13.4 Software Integrity Check –Installation**

Requirement:

AF shall validate the software package integrity before the installation stage strictly using the Secure cryptographic controls prescribed in Table 1 of the latest document

“Cryptographic Controls for Indian Telecom Security Assurance Requirements (ITSAR)” only.

Tampered software shall not be executed or installed if integrity check fails.

---

#### **2.13.5 Software Integrity Check – Boot**

Requirement:

The AF shall verify the integrity of a software component by comparing the result of a measurement of the component, typically a standard cryptographic hash generated strictly using the Secure cryptographic controls prescribed in Table 1 of the latest document “Cryptographic Controls for Indian Telecom Security Assurance Requirements (ITSAR)” to the expected reference value.

Note: This may not be applicable for GVNP Type 1 and Type 2.

---

#### **2.13. 6 Unused Physical and Logical Interfaces Disabling**

Requirement:

AF shall support the mechanism to verify both the physical and logical interfaces exist in the product. Physical and logical accessible interfaces (except console interface) which are not under use shall be disabled so that they remain inactive even in the event of reboot.

Note: This may not be applicable for GVNP Type 1 and Type 2.


---

#### **2.13.7 No Default Profile**

Requirement:

Predefined or default user accounts (other than Admin/Root) in AF shall be deleted or disabled.

---

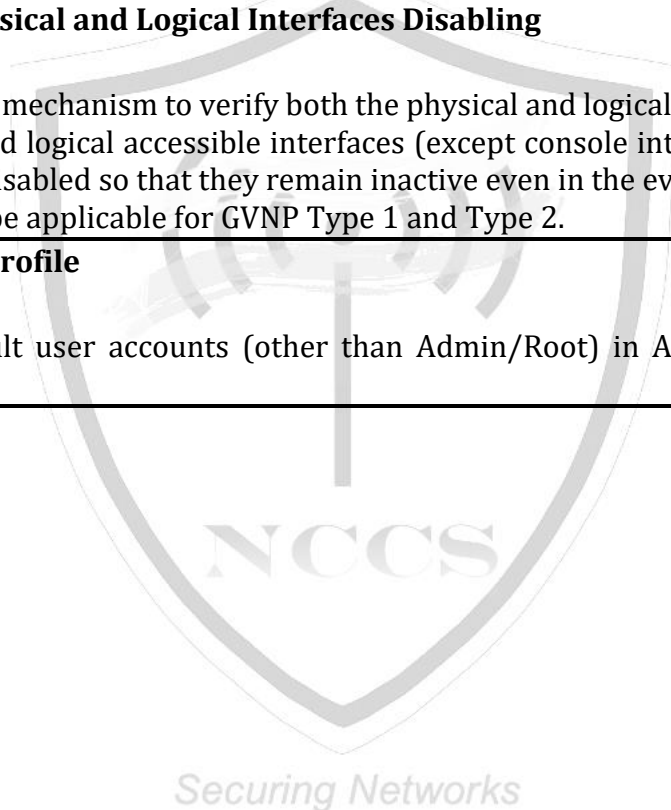

## **Chapter 3 – SPECIFIC SECURITY REQUIREMENTS**

---

### **Section 3.1: Event Exposure Service**

---

#### **3.1.1 Event Exposure service API authorization.**

Requirement:

The access to the Naf\_Event Exposure API may be authorized by means of OAuth2 protocol based on local configuration, using the “Client Credentials” authorization grant, where the NRF plays the role of the authorization server. This requirement needs to be considered for both roaming and non-roaming scenario.

[Reference: TEC 26578: 2022/ TSDSI STD T1.3GPP TS 29.517-16.5.0 V.1.0.0. section 5.9]

---

#### **3.1.2 Event Exposure Service API authorization when multiple NRFs deployed in the network**

Requirement:

When multiple NRFs deployed in a network, the NRF used as an authorization server shall be the same NRF that the NF service consumer used for discovering the Naf\_EventExposure service.

[Reference: TEC 26578:2022/ TSDSI STD T1.3GPP TS 29.517-16.5.0 V.1.0.0. section 5.9]

---

### **Section 3.2: Secure communication in case of co-existence of EPS and 5GC**

---

#### **3.2.1 Integrity protection of AF-NEF interface**

Requirement:

TLSv1.2 or above shall be used to provide integrity protection for the interface between the Application Function and Network Exposure Function.

[Reference: TEC 25878:2022/TSDSI STD T1.3GPP TS 33.501-16.12.0 V.1.0.0. section 12.3]

---

#### **3.2.2 Confidentiality protection of AF-NEF interface**

Requirement:

TLSv1.2 or above shall be used to provide confidentiality protection for the interface between the Application Function and Network Exposure Function.

[Reference: TEC 25878:2022/ TSDSI STD T1.3GPP TS 33.501-16.12.0 V.1.0.0. section 12.3]

---

#### **3.2.3 Replay protection of AF-NEF interface**

Requirement:

TLSv1.2 or above shall be used to provide replay protection for the interface between the Application Function and Network Exposure Function.



[Reference: TEC 25878:2022/TSDSI STD T1.3GPP TS 33.501-16.12.0 V.1.0.0. section 12.3]

### **3.2.4 Mutual authentication of AF and NEF when NEF supports CAPIF for external exposure.**

Requirement:

When the NEF supports CAPIF for external exposure, then CAPIF core function shall choose the appropriate security methods as defined in 3GPP TS 33.122, clause 6.5.2 for mutual authentication and protection AF and NEF interface.

[Reference: TEC 25878:2022/TSDSI STD T1.3GPP TS 33.501-16.12.0 V.1.0.0. section 12.5  
TEC 26782:2022/TSDSI STD T1.3GPP TS33.122-16.4.0 V.1.0.0 section 6,5,2]



## Definitions

1. **Access Traffic Steering:** The procedure that selects an access network for a new data flow and transfers the traffic of this data flow over the selected access network. Access traffic steering is applicable between one 3GPP access and one non-3GPP access.
2. **AF:** Application Function is the functional element that provides service or application related information to Network Function service consumers.
3. **AUSF:** AUSF is a network function with which SEAF and UDM interact during the authentication of UE.
4. **BDT (Background Data Transfer):** feature that enables a 3rd party service provider to keep their costs lower by favouring time windows for data transfer to specific UEs in a geographical area during non-busy hours that are less costly and able to handle larger bitrates
5. **DDoS:** DDoS is a distributed denial-of-service attack that renders the victim un- usable by the external environment.
6. **GUTI:** The purpose of the GUTI is to provide an unambiguous identification of the UE that does not reveal the UE or the user's permanent identity.
7. **Generic Network Product:** Generic Network Product (GNP) model as defined in Section 4.1 and 4.3 of TSDSI RPT T1.3GPP 33.926-16.4.0 V1.0.0
8. **Generic virtualized network product model (GVNP) Type 1:** GVNP Model as defined in Section 5.2.3 of TSDSI RPT T1.3GPP 33.818-17.1.0 V1.0.0
9. **Generic virtualized network product model (GVNP)Type 2:** GVNP Model as defined in Section 5.2.3 of TSDSI RPT T1.3GPP 33.818-17.1.0 V1.0.0
10. **Generic virtualized network product model (GVNP)Type 3:** GVNP Model as defined in Section 5.2.3 of TSDSI RPT T1.3GPP 33.818-17.1.0 V1.0.0
11. **Downlink:** Unidirectional radio link for the transmission of signals from a RAN access point to a UE. Also, in general the direction from Network to UE.
12. **Identifiable person:** one who can be identified, directly or indirectly, in particular by reference to an identification number, name or to one or more factors specific to his physical, physiological, mental, economic, cultural or social identity. NOTE: personal data can be gathered from user data and traffic data.
13. **Local access:** The access from Console interface, from local Console network, from LMT (Local Maintenance Terminal interface) or from GNP'/NE's local hardware interface.
14. **Local logical interface:** It is an interface that can be used only via physical connection to the GNP. That is, the connection requires physical access to the GNP. The entire protocol stack is considered to be part of the local logical interface. The entire protocol stack and the physical parts of the interface can be used by local connections. Local Logical Interfaces also include the local hardware interfaces and the Local Maintenance Terminal interface (LMT) of the GNP used for its maintenance through a console. i.e Local logical interface include OAM local console, LMT (Local Maintenance Terminal) interface and GNP local hardware interfaces. Attaching to a local interface may cause execution of complex internal procedures in the GNP like loading USB device drivers, enumeration of attached devices, mounting file systems etc.
15. **Machine Accounts:** These will be used for authentication and authorization from system to system or between applications on a system and cannot be assigned to a single person or a group of persons.

16. **Medium Access Control:** A sub-layer of radio interface layer 2 providing unacknowledged data transfer service on logical channels and access to transport channels.
17. **Mobility:** The ability for the user to communicate whilst moving independent of location.
18. **Network Element:** A discrete telecommunications entity which can be managed over a specific interface e.g. the RNC.
19. **NEF:** Nextwork Exposure Function, interwork with other network outside 5G.
20. **NG-RAN:** It is the radio access network introduced for accessing 5G.
21. **Node B:** A logical node responsible for radio transmission / reception in one or more cells to/from the User Equipment. Terminates the Iub interface towards the RNC.
22. **NSSF:** Network Slice Selection Function in 5G Core network, responsible for selecting network slice instances and network slice selection assistance information.
23. **NWDAF:** Network Data Analytic Function, provides network analytic information to 5G Core network functions and for Operation, Administration and Management (OAM)
24. **Non-Access Stratum:** Protocols between UE and the core network that are not terminated in the RAN.
25. **OAuth2:** Open Authorization 2.0 protocol designed to grant authorisation to set of resources.
26. **Original Equipment Manufacturer (OEM):** manufacturer of communication and its related products under whose brand, the products are sold or proposed to be sold to operators in the country.
27. **Packet:** An information unit identified by a label at layer 3 of the OSI reference model. A network protocol data unit (NPDU).
28. **Personal data:** any information relating to an identified or identifiable natural person ('data subject'). NOTE: personal data can be gathered from user data and traffic data.
29. **PLMN Area:** The PLMN area is the geographical area in which a PLMN provides communication services according to the specifications to mobile users. In the PLMN area, the mobile user can set up calls to a user of a terminating network. The terminating network may be a fixed network, the same PLMN, another PLMN or other types of PLMN. Terminating network users can also set up calls to the PLMN. The PLMN area is allocated to a PLMN. It is determined by the service and network provider in accordance with any provisions laid down under national law. In general the PLMN area is restricted to one country. It can also be determined differently, depending on the different telecommunication services, or type of MS. If there are several PLMNs in one country, their PLMN areas may overlap. In border areas, the PLMN areas of different countries may overlap. Administrations will have to take precautions to ensure that cross border coverage is minimized in adjacent countries unless otherwise agreed.
30. **PLMN Operator:** Public Land Mobile Network operator. The entity which offer telecommunications services over an air interface.
31. **Protocol data unit:** In the reference model for OSI, a unit of data specified in an (N)- protocol layer and consisting of (N)-protocol control information and possibly (N)- user data.
32. **Protocol:** A formal set of procedures that are adopted to ensure communication between two or more functions within the same layer of a hierarchy of functions.
33. **QoS profile:** a QoS profile comprises a number of QoS parameters. A QoS profile is associated with each QoS session. The QoS profile defines the performance expectations placed on the bearer network.
34. **QoS session:** Lifetime of PDP context. The period between the opening and closing of a network connection whose characteristics are defined by a QoS profile. Multiple QoS sessions may exist, each with a different QoS profile.

35. **Quality of Service:** The collective effect of service performances which determine the degree of satisfaction of a user of a service. It is characterized by the combined aspects of performance factors applicable to all services, such as;
  - a. service operability performance.
  - b. service accessibility performance.
  - c. service retainability performance.
  - d. service integrity performance and
  - e. other factors specific to each service.
36. **Radio link:** A "radio link" is a logical association between single User Equipment and a single RAN access point. Its physical realization comprises one or more radio bearer transmissions.
37. **Radio Resource Control:** A sublayer of radio interface Layer 3 existing in the control plane only which provides information transfer service to the non-access stratum. RRC is responsible for controlling the configuration of radio interface Layers 1 and 2.
38. **Registered PLMN (RPLMN):** This is the PLMN on which the UE has performed a location registration successfully.
39. **Registration Area:** A (NAS) registration area is an area in which the UE may roam without a need to perform location registration, which is a NAS procedure.
40. **Remote Access:** The access which is not Local access. This includes access from the EMS (Element Management System) network, and access that originates or passes through the internet.
41. **RRC Connection:** A point-to-point bi-directional connection between RRC peer entities on the UE and the UTRAN sides, respectively. An UE has either zero or one RRC connection.
42. **SEAF:** is an entity which is subsumed by AMF which communicates with UE and AUSF during device authentication.
43. **Security:** The ability to prevent fraud as well as the protection of information availability, integrity, and confidentiality
44. **Sensitive data:** data that may be used for authentication or may help to identify the user, such as user names, passwords, PINs, cryptographic keys, IMSIs, IMEIs, MSISDNs, or IP addresses of the UE, as well as files of a system that are needed for the functionality such as firmware images, patches, drivers or kernel modules.
45. **Serving Network:** The serving network provides the user with access to the services of the home environment.
46. **Software:** refers to the programs and data components which are usually stored on erasable media (e.g., disk), that can be dynamically written and modified during execution. Two general categories of software are system software and application software.
47. **Subscriber:** The responsibility for payment of charges incurred by one or more users may be undertaken by another entity designated as a subscriber. This division between use of and payment for services has no impact on standardization.
48. **Transmission or Transport:** is the transfer of information from one entity (transmitter) to another (receiver) via a communication path.
49. **Universal Subscriber Identity Module (USIM):** An application residing on the UICC used for accessing services provided by mobile networks, which the application is able to register on with the appropriate security.
50. **Uplink:** An "uplink" is a unidirectional radio link for the transmission of signals from a UE to a base station.
51. **User Equipment:** A device allowing a user access to network services. The interface between the UE and the network is the radio interface. A User Equipment can be subdivided into a number of domains, the domains being separated by reference points.

### Acronyms

5GC - 5G Core Network  
5GMM - 5GS Mobility Management  
5GS - 5G System  
5GSM - 5G Session Management  
AF - Application Function  
AKA - Authentication and Key Agreement  
AKA' - AKA Prime  
AKMA - Authentication and key management for applications  
ARP - Address Resolution Protocol/Allocation and Retention Priority  
ARPF - Authentication Credential Repository and Processing Function  
AS - Access Stratum  
ATSSS - Access Traffic Steering, Switching, Splitting  
AUSF - Authentication Server Function  
AUTS - Authentication failure message with synchronization failure  
BSF - Binding Support Function  
BDT - Background Data Transfer  
CAPIF - Common API Framework.  
CHF - Charging Function  
CIoT - Cellular Internet of things  
CLI - Command Line Interface  
CM - Connection Management  
CP - Control Plane  
CVE - Common Vulnerabilities and Exposures  
CWE - Common Weakness Enumeration  
CVSS - Common Vulnerability Scoring System  
DCCF - Data Collection Coordination Function  
DDoS - Distributed Denial of Service  
DL - Downlink  
DN - Data Network  
DNN - Data Network Name  
DS-TT - Device Side TSN Translator  
DTLS - Datagram Transport Layer Security  
EAP - Extensible Authentication Protocol  
EASDF - Edge Application Server Discovery Function  
ECS - EDNS Client Subnet  
EDNS - Extension Mechanism for DNS  
EMM - EPS Mobility Management  
EPC - Evolved Packet Core  
EPS - Evolved Packet System  
F-TEID - Fully Qualified Tunnel Endpoint Identifier

FQDN - Fully Qualified Domain Name  
gNB - 5G Next Generation base station  
GNP - Generalized Network Product  
GTP-C - GPRS Tunnelling Protocol Control Plane  
GTP-U - GPRS Tunnelling Protocol User Plane  
GUI - Graphical User Interface  
GUTI - Globally Unique Temporary Identifier  
GVNP - Generalized Virtual Network Product  
HTTP - Hypertext Transfer Protocol  
HTTPS - Hypertext Transfer Protocol Secure  
ICMP - Internet Control Message Protocol  
IE - Information Element  
IMS - IP Multimedia Subsystem  
IMPI - IMS Private Identity  
IMPU - IMS Public Identity  
IP - Internet Protocol  
IPUPS - Inter-PLMN User Plane Security  
IPX - IP exchange  
ISO-OSI - International organization of Standardization – Open System Interconnection  
JSON - JavaScript Object Notation  
JWS - JSON Web Signature  
JWT - JSON Web Token  
LBO - Local Breakout  
LMF - Location Management Function  
MA PDU - Multiple Access PDU  
MFAF - Messaging Framework Adaptor Function  
ML - Machine Learning  
N3IWF - Non-3GPP Interworking Function  
NAS - Non-Access Stratum  
NEF - Network Exposure Function  
NF - Network Function  
NG - Next Generation  
ng-eNB - Next Generation e-NodeB  
NG-RAN - Next Generation Radio Access Network  
NRF - Network Repository Function  
NSAC - Network Slice Admission Control  
NSSF – Network Slice Selection Function  
NSSAI – Network Slice Selection Assistance Information.  
NVD - National Vulnerability Database  
NWDAF - Network Data Analytics Function  
NW-TT - Network -side TSN Translator  
OAuth2 – Open Authorisation 2.0  
O&M - Operations and Maintenance  
OAM - Operations Administration Maintenance

OS - Operating System  
PCF - Policy Control Function  
PDR - Packet Detection Rule  
PDU - Protocol Data Unit  
PFCP - Packet Forwarding Control Protocol  
PFD - Packet Flow Descriptor  
PLMN - Public Land Mobile Network  
PRINS - Protocol for N32 Interconnect Security  
PSA - PDU Session Anchor  
QoS - Quality of Service  
RAM - Random Access Memory  
RAN - Radio Access Network  
RAT - Radio Access Technology  
RES - Response  
REST - Representational State Transfer  
RFC - Request For Comments  
RM - Registration Management  
RRC - Radio Resource Control  
S-NSSAI - Single - Network Slice Selection Assistance Information  
SBI - Service Based Interfaces  
SCP - Service Communication Proxy  
SDF - Service Data Flow  
SEAF - Security Anchor Function  
SEPP - Security Edge Protection Proxy  
SIDF - Subscription Identifier De-concealing Function  
SMF - Session Management Function  
SNPN - Stand Alone Non-Public Network  
SSC - Session and Service Continuity  
SUCI - Subscription Concealed Identifier  
SUPI - Subscription Permanent Identifier  
TA - Tracking Area  
TLS – Transport Layer Security  
TNGF - Trusted Non-3GPP Gateway Function  
TSC - Time Sensitive Communication  
TSN - Time Sensitive Networking  
TSTL - Telecom Security Testing Laboratory  
TT function - TSN Translator Function  
UDM - Unified Data Management  
UDR - Unified Data Repository  
UE - User Equipment  
UL - Uplink  
UPF - User Plane Function  
URI - Uniform Resource Identifier  
URL - Uniform Resource Locator

URLLC - Ultra Reliable Low Latency Communication  
VN - Virtual Network  
WLAN - Wireless Local Area Network





### List of Submissions

List of Undertakings to be furnished by the OEM for AF security Testing Submissions.

1. Source Code Security Assurance (against test case 2.3.3)
2. Known Malware and backdoor Check (against test case 2.3.4)
3. No unused Software (against test case 2.3.5)
4. No Unsupported Components (against test case 2.4.2)
5. Avoidance of Unspecified Wireless Access (against test case 2.4.3).
6. Cryptographic Module Security Assurance (against test case 2.6.2)
7. Cryptographic Algorithms implementation Security Assurance (against test case 2.6.3)
8. Vulnerability Scanning-Remediation Plan (against test case 2.9.3).



### References

1. TEC 25848:2022/TSDSI STD T1.3GPP 33.117-16.7.0 V.1.0.0. "Catalogue of General Security Assurance Requirements".
2. TSDSI STD T1.3GPP 23.501-16.15.0 V.1.2.0 Technical Specification Group Services and System Aspects; System architecture for the 5G System (5GS).
3. TSDSI STD T1.3GPP 23.502-16.15.0 V.1.2.0 Technical Specification Group Services and System Aspects; Procedures for the 5G System (5GS).
4. TEC 25878:2022 / TSDSI STD T1.3GPP 33.501-16.9.0 V.1.0.0 Security architecture and procedures for 5G System.
5. TEC 26578:2022/TSDSI STD T1.3GPP TS 29.517 -16.5.0 V.1.0.0 Application Function Event Exposure Services.
6. RFC 7540 Hypertext Transfer Protocol Version 2 (HTTP/2)
7. RFC 7515 JSON Web Signature (JWS)
8. RFC 7519 JSON Web Token (JWT)
9. RFC 6749 The OAuth 2.0 Authorization Framework.

